SKOPE Centaur Series

Horizontal and Vertical Chillers and Freezers

User Manual

MAN11086 Rev. 1.2 Sep. 2015

centaur from SKOPE

SKOPE Warranty Protection

Register now for peace of mind

It's quick and simple. Take a few minutes to register your SKOPE product and enjoy more efficient support plus other warranty benefits. When registering, make sure you have your cabinet serial number at hand.

To register online:
Visit our website at www.skope.com/warrantyprotection then complete and submit the online registration form.

Or freephone:
1800 121 535 (Australia)
0800 947 5673 (New Zealand)

SKOPE 1-year Extended Warranty
Extend your Warranty Protection by 1 year during registration. Please check you have not already organised an extended warranty through your dealer at time of purchase. For pricing information on an extended warranty visit www.skope.com/warrantyprotection

Service & Support

We know you will get years of satisfaction from your new SKOPE product when you follow a few simple preventative maintenance guidelines.

Helpful information is available on our website www.skope.com/serviceandsupport

Thank you for purchasing a SKOPE refrigeration product.

CONTENTS

1 Models

Undercounter 4
Sandwich 4
Pizza 4
Vertical 4

2 Installation

Safety First 5
Locating the Cabinet 6
Location 6
Ventilation 6
Power Supply 6
Positioning the Cabinet 7
Castors 7
Adjustable Height Legs 7
Shelving 7
Pans and Hinged Pan Covers 8

3 Operation

Automatic Start-Up 9
Power Switch 9
Refrigeration Unit 9
Electronic Controller 9
Electronic Controller 10
Introduction 10
Faceplate 10
Stand-by Mode 12
Temperature Setpoint 12
Controller Messages and Alarms 12

4 Servicing

Cleaning 14
Cabinet 14
Condenser Coil 14
Pans & Air Diffusers 14
Lighting 15
Cabinet Interior Lights 15
Troubleshooting 16

1 Models



Undercounter

Model	*Type*	*Part No.*	*Doors*	*Operating temperature range*
BC070-CB	Chiller	B070CB-1ROOS-E	1 × solid door	1°C to 4°C up to 38°C ambient
BC090-C		B090-C-1ROOS-E	1 × solid door	
BC120-C		B120-C-2RROS-E	2 × solid door	
BC180-C		B180-C--3RRRS-E	3 × solid door	
BC180-CS		B180-CS-6RROS-E	6 × drawers	
BC120-CG		B120-CG-2RROS-E	2 × glass door	1°C to 4°C up to 32°C ambient
BC180-CG		B180-CG-6RROS-E	3 × glass door	
BC120-C	Freezer	B120-C-2FFOS-E	2 × solid door	-23°C to -18°C up to 38°C ambient



Sandwich

Model	*Type*	*Part No.*	*Doors*	*Operating temperature range*
BC120-S	Chiller	B120-S-2RROS-E	2 × solid door	0°C to 4°C for up to 4 hours in 30°C ambient (with hinged pan covers raised)
BC180-S		B180-S-3RRRS-E	3 × solid door	



Pizza

Model	*Type*	*Part No.*	*Doors*	*Operating temperature range*
BC180-P	Chiller	B180-P-2RROS-E	2 × solid door	0°C to 4°C for up to 4 hours in 30°C ambient (with hinged pan covers raised)
BC240-P		B240-P-2RRRS-E	3 × solid door	
BC240-PS		B240-PS-22RRRS-E	2 × solid doors and 2 × drawers	

Vertical

Model	*Type*	*Part No.*	*Doors*	*Operating temperature range*
BC074	Chiller	B074-1ROOS-E	1 × solid door	1°C to 4°C up to 38°C ambient
BC126		B126-2RROS-E	2 × solid doors	
BC074	Freezer	B074-1FOOS-E	1 × solid door	-23°C to -18°C up to 38°C ambient
BC126		B126-2FFOS-E	2 × solid doors	

2 Installation

Safety First

Always observe safety precautions when using any electrical appliance. Read these instructions carefully and retain them for future reference.

- When the appliance is used by or near young children or infirm persons, close supervision is necessary, especially to ensure children do not play with it.
- Do **not** use this appliance for other than its intended use.
- Do **not** cover the grilles or block the entry or exhaust of airflow by placing objects up against the refrigeration unit.
- Do **not** probe any opening.
- Only use this appliance with the voltage specified on the rating label.
- Ensure the appliance has adequate ventilation as this is essential to economical, high performance.
- Be careful not to touch moving parts and hot surfaces.
- For your own safety and that of others, ensure that all electrical work is done by authorised personnel.
- If the power supply flexible cord becomes damaged, it must be replaced by an authorised service agent or similarly qualified person in order to avoid a hazard.
- Ensure all necessary safety precautions are observed during installation or removal of the refrigeration unit.
- The appliance is not designed to be stable while in motion. Use extreme caution when moving or transporting it.
- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- Please contact SKOPE customer services for advice regarding disposal of this appliance.

CAUTION

Never overload the power supply, which could damage the cabinet and product. See the rating label inside the cabinet for the safe power supply and current draw.

WARNING

Always disconnect the cabinet from the mains power supply before any cleaning or maintenance.

Locating the Cabinet

Location

When positioning the cabinet, avoid direct sunlight and warm draughts etc, and areas where the refrigeration unit could be exposed to water or moisture. The cabinet must NOT be situated where it is affected by warm or hot air from adjacent equipment, as this will compromise the airflow and performance of the cabinet.

This chiller is designed to operate within a specific climatic class environment (see cabinet rating label for climate class number).

Climate Classes

Climate Class	Ambient Temperature	Relative Humidity (RH)
3	25°C	60%
4	30°C	55%
5	40°C	40%

The cabinet must be positioned on a level surface for the doors to shut and seal correctly, and to prevent the condensate tray from overflowing. Adequate allowance should be made for door and/or drawer opening.

Sandwich and Pizza cabinets have pan openings with hinged pan covers on the top of the cabinet. Maximum air movement around the opening area of the cabinet must not exceed 0.3 m/s. Excessive air movement will cause failure of the air curtain above the pans and excessive temperature rise.

When installing the cabinet

- Ensure all packaging is removed from the cabinet.
- Avoid direct sunlight and warm draughts etc.
- Allow adequate space for the door/s and/or drawer/s to open fully.
- Ensure the cabinet is positioned on a level surface so the door/s shut and seal correctly and to prevent the condensate tray from overflowing.
- Air movement above Sandwich and Pizza cabinets must not exceed 0.3 m/s.

Ventilation

Ensure there is always at least a 150mm gap around the back and the refrigeration unit side of the cabinet. It is critical that the hot refrigeration exhaust air is not restricted and that it can easily flow out and away from the front of the cabinet. Never store cardboard cartons or other items in front of the refrigeration unit. The ventilation slots on the refrigeration unit front cover must be kept clear at all times.

Normal operating conditions should not exceed the operating temperature range (see page 4).

Power Supply

The cabinet is supplied with a flexible power cord and plug which exits the rear of the cabinet.

Before final positioning of the cabinet, pull the power cord out from the rear compartment and connect to the power supply. For convenience, any surplus cord length may be left inside the cabinet compartment.

WARNING:

Do **NOT** overload the power supply. See the rating label inside the cabinet for power supply and current draw.

Positioning the Cabinet

The cabinet is fitted with a set of four swivel castors, and is supplied with a set of four adjustable height legs, which can be fitted in place of the castors depending on specific height and manoeuvrability requirements. The legs or castors should be fitted to the base of the cabinet before final positioning.

Castors

The castors screw into the castor mounting plates on the bottom of the cabinet. Where castors are fitted, the two lockable castors should be fitted to the front of the cabinet and the non-locking castors fitted to the rear.

Adjustable Height Legs

The adjustable height legs screw into the castor mounting plates on the bottom of the cabinet. Remove the castors to fit the legs.

Rotate the bottom section of the legs to adjust the height. The legs can be used to raise the cabinet between 100mm and 160mm above the floor.

To adjust leg height

1. Turn the plastic foot at the bottom of the leg clockwise to increase, or counter-clockwise to decrease the height.

Refer to the table below for the adjustable height leg part number.

Adjustable height leg part number

Item description	SKOPE part number
Centaur adjustable height leg	BC-AJL03-00

Shelving

The cabinet is supplied with shelves and shelf support brackets which can be positioned at different heights to suit various products.

To fit the shelves

1. Unpack the shelving items from inside the cabinet.
2. Establish the desired position for each of the shelves, based on the height of the product intended to go on each shelf.
3. Fit the shelf support brackets into the corresponding slots in both the front and back support strips. Each shelf requires four support brackets.
4. Sit each shelf on the support brackets.

The cabinet should be left running for 30 minutes before loading with product.

When loading product

- Allow air space around all the product to ensure even cooling and efficient operation of the cabinet.
- Do not allow products to overhang the front of the shelf as this could prevent the doors from shutting. Leave an airspace of at least 75mm above product loaded on the top shelf.
- Do not exceed a maximum loading of 20kg per shelf.
- Remove some product if the shelves are flexing or bending.

Pans and Hinged Pan Covers

Sandwich and Pizza cabinets are supplied with food preperation pans which fit into openings on top of the cabinet, and hinged pan covers. Refer to the tables below for standard pan and hinged pan cover quantities:

Sandwich cabinet

Model	Doors	Pans	Hinged pan covers
BC120-S	2 doors	6 × 1/3 refrigerated pans (176mm wide × 325mm deep)	1
BC180-S	3 doors	9 × 1/3 refrigerated pans (176mm wide × 325mm deep)	1

Pizza cabinet

Model	Doors/Drawers	Pans	Hinged pan covers
BC180-P	2 doors	9 × 1/3 refrigerated pans (176mm wide × 325mm deep)	2
BC240-P	3 doors	12 × 1/3 refrigerated pans (176mm wide × 325mm deep)	3
BC240-PS	2 doors and 2 drawers	12 × 1/3 refrigerated pans (176mm wide × 325mm deep)	3

For correct operation of the cabinet, the hinged pan covers must stay closed to cover the food preparation pans when not in use. The maximum recommended operating ambient temperature for Sandwich and Pizza cabinets is 30°C.

IMPORTANT

The hinged pan covers should be closed when the pans are not in use. Leaving the covers open for extended periods will compromise performance of the cabinet.

3 Operation

Automatic Start-Up

Connect the cabinet to the mains power supply and check operation of the refrigeration unit and electronic controller. Ensure the cabinet power switch is turned on.

IMPORTANT
If the cabinet has been on its back, leave for 30 minutes before running.

Power Switch

The cabinet is fitted with a power switch, usually located beside the electronic controller. Depending on the model, it may be necessary to open the unit front cover to access the switch.

Refrigeration Unit

The compressor, and the condenser and evaporator fans should all operate within two minutes from the time the cabinet is plugged in. This may be verified by listening for compressor switch-on and checking for air movement inside the cabinet. The compressor and condenser fan will switch off when the cabinet internal air reaches a pre-set temperature.

Electronic Controller

When the cabinet is connected to the power supply, the electronic controller will display the current cabinet temperature. The compressor symbol will come on after a few minutes, indicating the compressor and condenser fan is operating.

To ensure efficient operation, the electronic controller forces regular defrosts. During the defrost cycle, the compressor and condenser fan switch off and the evaporator fan stays on.

Electronic Controller

Introduction

Depending on the model, the cabinet will be fitted with a CAREL Easy electronic controller or a CAREL ir33 electronic controller (refer to faceplate below to identify the type of electronic controller.

The electronic controller is visible through a cut-out in the front panel. It controls and displays the cabinet interior temperature and signals temperature alarms. It uses temperature probes around different areas of the refrigeration system to collect data and runs the cabinet accordingly .

The electronic controller is pre-programmed and requires no initial setup or additional programming. SKOPE does not recommend that the settings be changed unless it is absolutely necessary.

Faceplate

Because the electronic controller plays such an important role, it's helpful to know the parts of the faceplate you may use.

CAREL Easy electronic controller

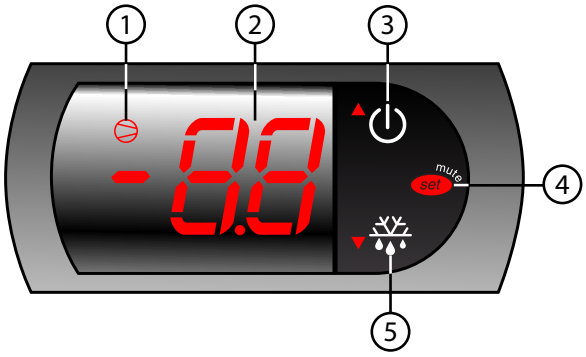

CAREL Easy electronic controller faceplate

Item	Icon	Function
1		**Compressor indicator:** ON when the compressor and condenser fan starts. Flashes when activation of the compressor is temporarily delayed.
2		**Display:** Shows the cabinet temperature. Flashes when the door is open.
3		**Stand-by (up) button:** Turns stand-by mode on and off. To scroll settings up (in program mode). **Note:** This is not an isolation switch.
4		**Mute (set) button:** Mutes the audible alarm (buzzer) and deactivates the alarm relay, and used in program mode.
5		**Manual defrost button:** Press for more than 5 seconds to initiate manual defrost. To scroll settings down (in program mode).

CAREL ir33 electronic controller

CAREL ir33 electronic controller faceplate

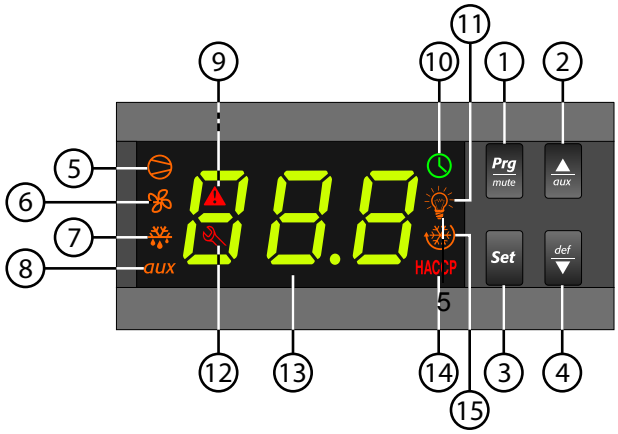

Item	Icon	Function
1	Prg mute	**Mute / program:** Mutes the audible alarm (buzzer) and deactivates the alarm relay. To initiate program sets, press for 5 seconds.
2	aux	**Up:** To scroll settings up (in program mode).
3	Set	**Set point:** If pressed for more than 2 seconds displays and / or enables changing the temperature setpoint.
4	def	**Manual defrost / down:** Press for more than 5 seconds to initiate manual defrost. To scroll settings down (in program mode).
5		**Compressor:** ON when the compressor and condenser fan starts. Flashes when activation of the compressor is temporarily delayed.
6		**Fan:** Shows when the fan is operational.
7		**Defrost:** ON when the defrost is activated. Flashes when the activation of the defrost is temporarily delayed due to procedures in progress.
8	aux	**Aux:** n.a.
9		**Alarm:** Flashes in the event of alarms.
10		**Clock:** n.a.
11		**Light:** n.a.
12		**Service:** Flashes in the event of malfunctions.
13	88.8	**DISPLAY:** Shows the cabinet temperature. Flashes when the door is open.
14	HACCP	**HACCP:** n.a.
15		**CONTINUOUS CYCLE:** On when freezer is running in continuous run mode.

Stand-by Mode

Only applicable on the CAREL Easy electronic controller. Press and hold the stand-by button for three seconds to turn stand-by mode on or off. When stand-by mode is on, the controller display will alternate between the cabinet temperature and **Of**, and the compressor, fans and alarms are disabled. Where applicable, the interior lights are still activated by the door switch and will come on when a door is opened.

Temperature Setpoint

The temperature setpoint is factory set and can be adjusted if necessary. SKOPE do not recommend that the setpoint be changed unless it is absolutely necessary, and then only by small increments at a time.

To view and adjust the temperature setpoint

1. Press and hold the **set** button until the controller display shows **SEt** followed by a temperature value. The temperature value is the current setpoint.

   Note: If **PS** appears on the display, the **set** button has been held for to long. Release it, then press the **set** button twice to restart the procedure.
2. Press the **up** and **down** buttons to adjust the value to the required setpoint.
3. Press the **set** button again to memorise the new setpoint value.

Controller Messages and Alarms

The following table explains messages that the electronic controller displays and related alarms. Alarms signal unexpected operational changes in the freezer and stop when action is taken to resolve the problem.

Note: The messages and alarms differ between the CAREL Easy electronic controller and the CAREL ir33 electronic controller. Refer to the relevant table either below (CAREL Easy) or over page (CAREL ir33).

CAREL Easy messages and alarms

Code	Alarm	Action
dF	Defrost cycle in progress mesasge	Cabinet is running correctly. Message will stop displaying once the defrost cycle is complete.
E0	Temperature sensor fault alarm	Reset alarm by unplugging the cabinet from the power supply for one minute, then reconnect. If alarm persists, arrange service call.
E1		
L0	Product low temperature alarm	
H1	Product high temperature alarm	
EE	Parameter error alarm	
EF		
Ed	Defrost error alarm	

CAREL ir33 messages and alarms

Code	Display	Alarm	Action
HI	Flashing	Product HIGH temperature alarm (auto reset)	1. Check the cabinet product loading to ensure ventilation slots are not blocked, and that product does not overhang the shelves. Ensure the doors are closed. 2. Ensure the cabinet is installed with good refrigeration unit ventilation. 3. Check and clean the condenser coil (see page 14). 4. If immediate alarm recovery is required - unplug the cabinet from the power supply for 1 minute, then reconnect to power supply. If alarm persists, contact SKOPE.
LO	Flashing	Product LOW temperature alarm (auto reset)	
cht	Flashing	Refrigeration system high temperature pre-warning (auto reset)	1. Clean the condenser coil (see page 14). 2. Check refrigeration ventilation. Ensure clear airpath in front of the cabinet. 3. Ensure the cabinet is installed in a suitable environment. 4. To reset the 'CHt' alarm - unplug the cabinet from the power supply for 1 minute, then reconnect to power supply. If alarm persists, contact SKOPE.
CHt	Flashing	Refrigeration system and cabinet high temperature shutdown (manual reset)	
E0	Flashing	Ambient probe fault (also flashes 'rE')	To reset alarm - unplug the cabinet from the power supply for 1 minute, then reconnect to power supply. 1. If alarm persists, contact SKOPE.
E1	Flashing	Evaporator probe fault	
E2	Flashing	Condenser probe fault	
Edl	None	Defrost over-time limit	
Etc	Flashing	Real-time clock fault	
EE	Flashing	Controller E prom error	
EF	Flashing	Controller E prom error	
dFb	None	Start defrost request	None
dFE	None	End defrost request	
door	Flashing	Door open alarm	Check that a door or drawer has not been left open. Note: The audible alarm buzzer cannot be turned off manually.

4 Servicing

Cleaning

Cabinet

When necessary, wipe both the interior and exterior of the cabinet with a damp cloth. Ensure the cabinet is unplugged from the mains power supply before cleaning the cabinet.

> **CAUTION**
>
> Unplug the cabinet from the mains power supply before cleaning the condenser coil or washing the cabinet with water.

Condenser Coil

The condenser coil should be brushed clean once a month and blown clean by qualified service personnel every six months. Over time, dust may accumulate within the condenser that cannot be removed with a brush. If this occurs, contact SKOPE to arrange for a SKOPE authorised service agent to clean the condenser with compressed air.

Unplug the cabinet from the power supply before cleaning the condenser coil.

To clean the condenser coil on horizontal cabinets

1. Isolate the cabinet from the power supply by unplugging it from the wall.
2. Open the unit front cover (usually located on the LH side of cabinet) to gain access to the condenser filter and coil.

   Note: On model BC070-CB, the condenser coil is located at the rear of the cabinet. Pull the cabinet out so access is available at the rear of the cabinet, and unscrew the condenser coil cover to access the coil.
3. If fitted, remove the condenser filter by sliding it up, and remove all dust and fluff from the filter.
4. Brush the condenser coil in the directions of the fins to remove all dust and fluff.
5. Refit the condenser filter, close the unit front cover and reconnect the cabinet to the power supply.

To clean the condenser coil on vertical cabinets

1. Isolate the cabinet from the power supply by unplugging it from the wall.
2. Swing the top panel (above the door/s) out to gain access to the condenser coil.
3. Brush the condenser coil in the directions of the fins to remove all dust and fluff.
4. Close the top panel and reconnect the cabinet to the power supply.

Pans & Air Diffusers

Sandwich and Pizza cabinets only. The food preparation pans and air diffuser panels can be easily lifted from the cabinet for cleaning.

Lighting

Cabinet Interior Lights

Depending on the model, the cabinet may be fitted with one of the light variations shown in the table below. Follow the relevant procedure further below to replace the light.

Note: Some models are not fitted with interior lights.

Centaur light variations

Light type
25W bulb (OSRAM PYGMY CL25E14)
15W T8 fluorescent tube
Centre pillar LED strip light

To replace an interior 25W bulb (OSRAM PYGMY CL25E14)

1. Isolate the cabinet from the power supply by unplugging it from the wall.
2. Unscrew and remove the light cover.
3. Remove the light, and replace with the same type.
4. Refit the light cover and reconnect the cabinet to the power supply.

To replace an interior 15W T8 fluorescent tube

1. Isolate the cabinet from the power supply by unplugging it from the wall.
2. Remove the diffuser by squeezing it until it is released from the housing, and then push the diffuser out of the way.
3. Rotate the fluorescent tube until the pins on the ends of the tube align with the slots, then slide it out. **Note:** Access can be made easier by removing the shelves.
4. Fit a new fluorescent tube and clip the diffuser back into place. When fitting vertically mounted fluorescent tubes, ensure the tube is fitted with the ‘Power’ end at the top.

Centre pillar LED strip light

Centre pillar LED strip lights are non-serviceable items and must not be tampered with in any way. If a component is suspected of being faulty, a service call should be arranged so that a replacement component can be fitted.

Troubleshooting

Complaint	Possible Cause	Repair
1. Cabinet not operating and no controller display:	• Loss of power supply.	• Check that the cabinet power switch is turned on (see page 9). • Check mains power supply.
2. Power consumption is higher than expected:	• Unit operating too hot. • Cabinet doors are opened excessively.	• Clean condenser. Ensure the cabinet is installed with good ventilation around the refrigeration unit. • Keep door/s open for minimum time.
3. Product is too warm and spoiling:	• Restricted cabinet airflow. • Temperature setpoint is too warm.	• Ensure product is not blocking airflow slots and the product is no closer than 75mm from the cabinet top. • Adjust setpoint (see page 12).
4. Warm cabinet temperatures and/or compressor operating for long periods (more than 1 hour):	• Blocked condenser. • Poor refrigeration unit ventilation.	• Clean condenser coil (see page 14). • Ensure the cabinet is installed with good ventilation around the refrigeration unit.

SKOPE Contacts

SKOPE Industries Limited

NEW ZEALAND CONTACT
Head Office
PO Box 1091, Christchurch
New Zealand
Freephone: 0800 947 5673
Fax: (03) 983 3896
E-mail: enquiry@skope.co.nz
Website: www.skope.co.nz

AUSTRALIAN CONTACT
A.B.N. 73 374 418 306
PO Box 7543, Baulkham Hills B.C.
NSW 2153, Australia
Freephone: 1800 121 535
Fax: 1800 121 533
E-mail: enquiry@skope.com.au
Website: www.skope.com.au

Trademark Infringement

The SKOPE and Centaur trademarks on this product are infringed if the owner, for the time being, does any of the following:

- Applies the trade mark to the product after their state, condition, get-up or packaging has been altered in any manner
- Alters, removes (including part removal) or obliterates (including part obliteration) the trade mark on the product
- Applies any other trade mark to the product
- Adds to the product any written material that is likely to damage the reputation of the trade mark

Notice of the above contractual obligations passes to:

- Successors or assignees of the buyer
- Future owners of the product

SKOPE Centaur Series
Horizontal and Vertical Chillers and Freezers
User Manual
MAN11086
Rev. 1.2 Sep. 2015

© 2015 SKOPE Industries Limited. All rights reserved.
SKOPE Industries Limited reserve the right to alter specifications without notice.

SKOPE® and centaur® are registered trademarks of SKOPE Industries Limited.